REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

DESCRIPTION

- Standard models include:
  - D38999 Series III connectors.
  - One Socket and one Pin connector.
  - All connectors come standard with Nickel finish & N key rotation.
  - Choose between Tip Jacks, Mini Banana, or Banana Jacks.
- Optional upon request:
  - Other gender combinations are available.
  - Other finishes & key rotations available.
  - Optional Series I & II are available.
- Circular Breakout Boxes use a color-coding scheme as an aid:
  - The Red jacks connect to the "J1 - Red" connector with SKT contacts.
  - The Black jacks connect to the "J2 - Black" connector with PIN contacts.
- Toggling the switch will make or break connection between corresponding pins.
- Housed in a heavy duty 0.080" thick aluminum box with welded corners
- All units are subjected to a 500VDC Hipot test.

PHYSICAL SPECIFICATIONS

Dimensions: 17 in x 15 in x 4 in
Material: 0.080" Thick Aluminum Alloy
Finish: Clear Chemical Conversion Coat
Color: Chip Gray
Temperature Rating: -30ºC to 85ºC
Connector J1: D38999/20FJ35SN
Connector J2: D38999/20FJ35PN
Jack Spacing: 0.5 in

MATE OPTIONS

"J1 - RED" CONNECTOR MATES:
- D38999/26FJ35PN

"J2 - BLACK" CONNECTOR MATES:
- D38999/26FJ35SN

WE MAKE ADAPTER CABLES

PART NUMBER OPTIONS

JACKS WITH SWITCHES:
- SE-01122-1: Tip Jacks W/ Switches
- SE-01122-2: Mini-Banana Jacks W/ Switches
- SE-01122-3: Banana Jacks W/ Switches

LOCKING SWITCHES AVAILABLE UPON REQUEST.

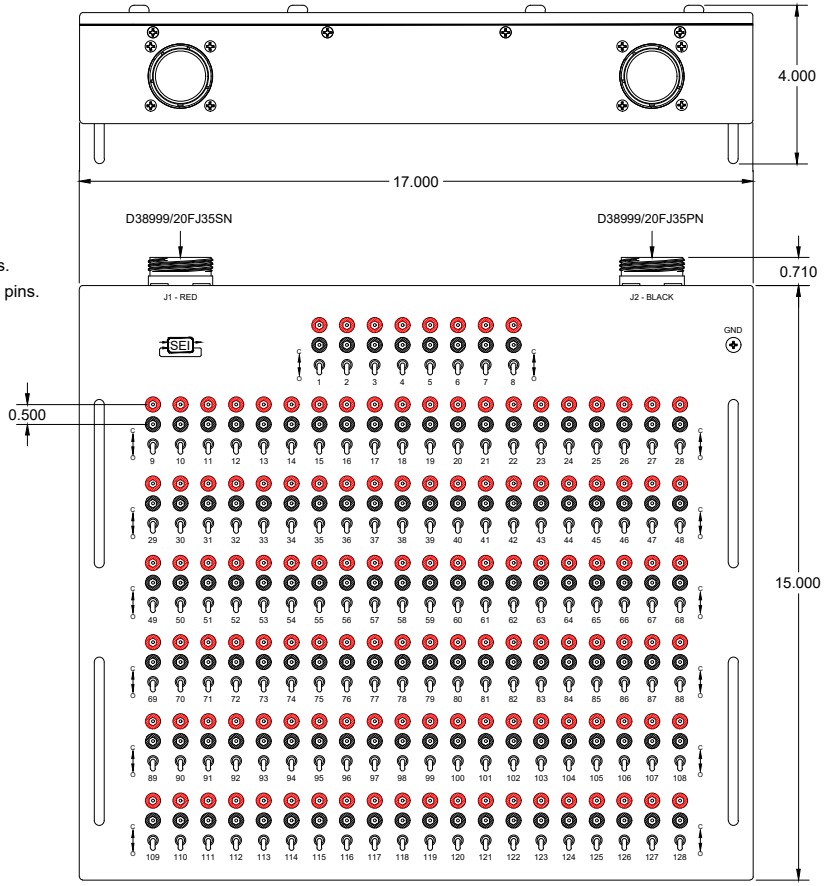

ELECTRICAL SPECIFICATIONS

Max Continuous Current: 5.0A
Max Voltage: 28VDC/70Vrms

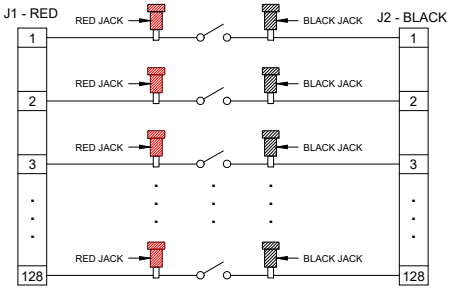

SCHEMATIC W/ SWITCHES

SE-01122: 128 POS CIRCULAR BOB DATA SHEET

SILVER ENGINEERING INC.		SIZE	CAGE CODE	DWG. NO.		REV.
DRAWN EW 251113		D	0RJ73	SE-01122		-
ISSUED		SCALE 1/1	CFG #: SE-08122		SHEET 1	

CAGE CODE 0RJ73 | DRAWING NUMBER SE-01122 | SHEET 1 | REV -

LAST MODIFIED 26/05/07
AUTOCAD FORMAT